



SKU: JK-FT-ASM0



Fitting Instructions

Jeep JK Wrangler

Flip Table

***Australia's Best Off Road Products
Created... Not Cloned***

Contents

| | |
|-----------------------------|----------|
| WHY UNEEK | 3 |
| COMPONENTS AND PARTS | 4 |
| STEP 1 | 5 |
| STEP 2 | 5 |
| STEP 3 | 5 |
| STEP 4 | 6 |
| STEP 5 | 6 |
| STEP 6 | 6 |
| OPERATION | 7 |
| NOTES | 7 |
| FINISHED PRODUCT | 8 |

Why Uneek

Australian Designed and Built

All our products are designed and manufactured right here in Australia, allowing us to have better lead times and better quality control than companies manufacturing overseas. By supporting us you're supporting to grow the Australian economy and our brand.

Uneek Styling

We do not design our bars to look the same across the vehicle range. We fully develop our own product to individually suit each vehicle. We take time in designing from scratch and then test all our bars to comply with all relevant ADRs and Australian Standards.

Lightweight Through Smart Engineering

Having a steel bar doesn't mean you have to add more weight than is required to the front of your vehicle. Our engineering practises ensure we have the right protection, designed the right way to ensure protection is at its maximum and weights at its minimum.

Proven Off Road

We take our products out and test them right here in the heart of our country in our Australian conditions so we know our products can withstand anything you throw at them.

Increased Approach Angles

Our bars are designed to give you the best advantage while off road, with increased approach angles means you can tackle those tough and steep angles better than you could with the original setup or other alternatives.

Warranty

Uneek 4x4 back itself as Australia's leading steel bull bar manufacturer. This is why we provide you with the best steel bar warranty in Australia - 5 years.

Components and parts

Please Note: This table is made from 316 marine grade stainless steel, and will not rust or corrode. It is designed to fit the rear door of a JK wrangler with the sub woofer still fitted. It will also fit other vehicles. Always be careful with pinching fingers in-between the table when closing it.

CONTENTS

- 1 off, pre-assembled tailgate table assembly
 - 1 off, fastener kit
 - 8 off, M6 threaded inserts
 - 8 off, M6 x 20 hex bolts
 - 8 off, M6 flat washers
 - 8 off, Self-taping screws

Step 1

Ensure that instructions are read start-finish before proceeding and that all fasteners listed above are supplied.

Step 2

With the tailgate table assembly in the 'open' position, locate the table as shown in Figure 1.

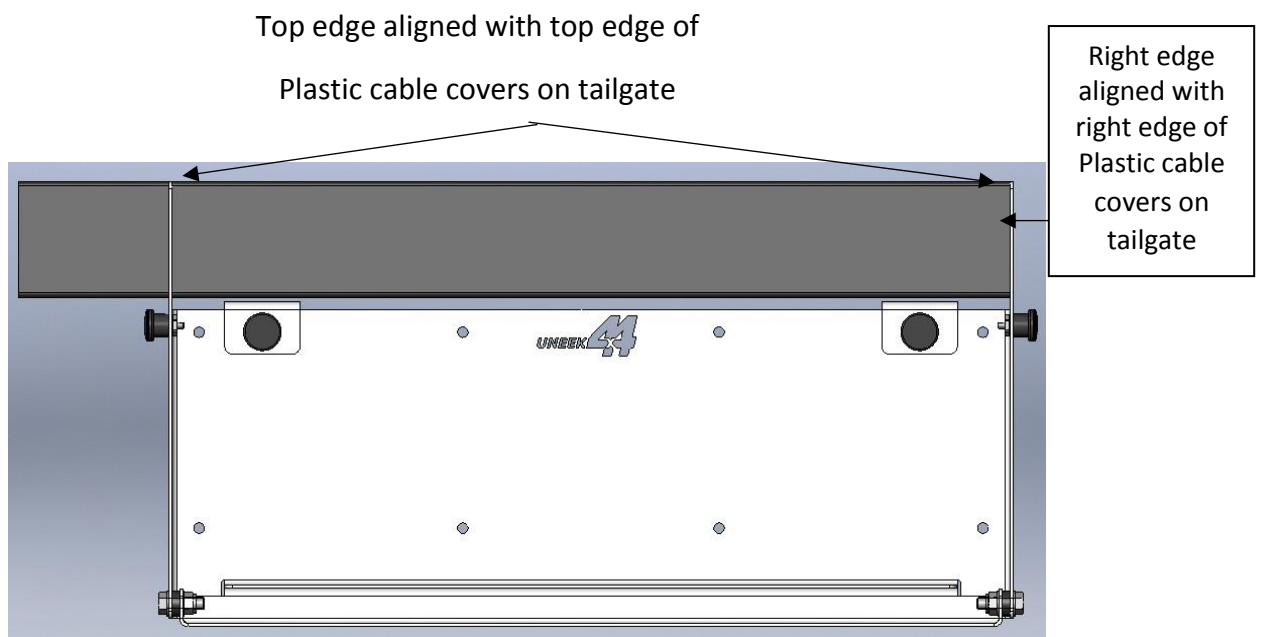


Figure 1: Locating Tailgate Table Assembly

Once located correctly, the tailgate assembly should have approximately 5mm clearance below the plastic cable cover on the tailgate assembly. Ensure correct fitment before proceeding.

Step 3

You can either use the self drilling self tapping screws or if you have a nutsert gun install the m6 nutserts. With the self drilling and tapping screws simply line up the table and drill them in, for using nutserts refer to directions here for steps 3-6. With tailgate table assembly aligned on the tailgate, mark each of the 8 mounting holes with a marker. Remove the tailgate table assembly and place to one side.

Step 4

Centre punch each of the 8 mounting holes marked in Step 3). With a step drill (or stepped approach using standard drill bits) drill each of the 8 holes to Ø9.5mm. Ensure that each hole is de-burred and any bare metal is coated with paint and allowed to dry before proceeding.

Step 5

Insert and set an M6 stainless steel threaded insert into each of the 8 mounting holes. Use a M6 threaded insert hand install tool to fit.

Step 6

Align the tailgate table assembly to the mounting holes. Attach the tailgate table assembly to the tailgate using an M6 stainless steel flat washer, M6 stainless steel spring washer and M6 stainless steel spring washer at each mounting hole.

Operation

1) Pull outwards the indexing plunger knob on one side only, rotate 1/4 turn in either direction and release the knob. The knob will locate in its 'rest' position. Complete this same procedure on the other side.

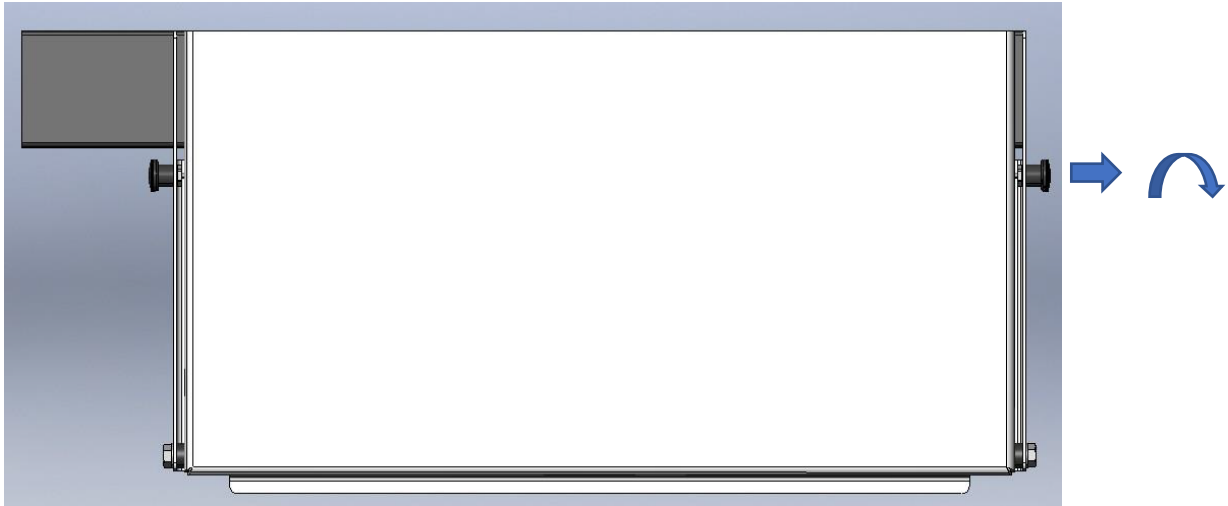


Figure 2: Indexing Plungers

- 2) Slowly fold the table section down into the 'open' position. The folding table section is self-supporting.
- 3) Enjoy the ease of using your new table surface.

Notes

- 1) Yes, the folding table section locates quite firmly against the rubber bump stops on the table frame. The folding table section may require some manipulation to allow the indexing plunger to locate into the slot on each side of the table. This is intentional, and removes any possibility of vibration, even over the roughest terrain.
- 2) The hinge assembly and indexing plunger holes have a small margin for locating the hinge assemblies or indexing plungers. Once installed, your tailgate table may require slight adjustment in these holes for correct alignment.
- 3) As this table is self-supporting, you should endeavour to minimise any weight placed on the table. Heavier items should be placed towards the rear of the table surface to minimise any possibility of bending or damage to the tailgate.

Finished Product



Revised: 27/08/2019

***Australia's Best
Off Road Products
Created... Not Cloned***

20 Gateway Drive, Carrum Downs, VIC, 3201

1800 806 952

www.uneek4x4.com.au

